

CTPA Slit Lightweight Polyamide 6 Flexible Conduit

Description

Flexible standard weight nylon (PA6) conduit is a general purpose conduit suitable for automotive harness applications. It can withstand extremes of temperatures and resists automotive oils and solvents. It is extremely tough and has a high impact strength and fatigue life.

CTPA conduits provide protection against mechanical shock and ingress of water whilst maintaining their form through tight bend radii.


Applications

Lightweight convoluted tube used for interior harness offering limited mechanical protection to provide abrasion resistance and enhance the aesthetics of the harness.

Extremely light and flexible.

Resistant to oils and solvents.

Configurations and Dimensions

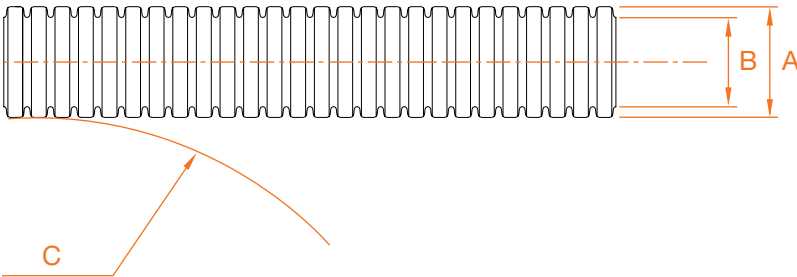

Part No.	Conduit Size (NC)	Conduit Size (NW)	Nominal O/D	Minimum Bore	Minimum static bend radius	Reel Length (m)
			A	B	C	
CTPA08-S	08	7.5	10.0	6.5	10	100
CTPA10-S	10	8.5	11.5	8.7	15	100
CTPA12-S	12	10	13.0	10.1	20	100
CTPA16-S	16	13	16.0	11.8	35	100
CTPA18-S	18	14	18.5	14.5	35	100
CTPA20-S	20	17	21.2	16.9	45	100
CTPA25-S	25	22	25.6	21.3	45	100
CTPA28-S	28	23	28.3	23.1	45	100
CTPA32-S	32	29	34.5	28.8	55	100
CTPA40-S	40	36	42.5	35.0	65	25
CTPA50-S	50	48	54.3	46.5	75	25