

## Solenoid Connector Interfaces

### Description

Screw-thread straight and elbow connectable interfaces for circular solenoids, sensors and switches.


These fittings are designed for use with all types of unslit conduit thus maintaining maximum conduit bore.

See Quick link for details on reducing options which enable each straight fitting to accommodate a variety of conduit sizes.

### Accessories/Please Note:

For extending the capability of sealed fittings, consult us for the following: clamping rings, end sleeves, end caps, grommet seals, locknuts, face sealing washers, thread reducers/enlargers.

### Configurations and Dimensions

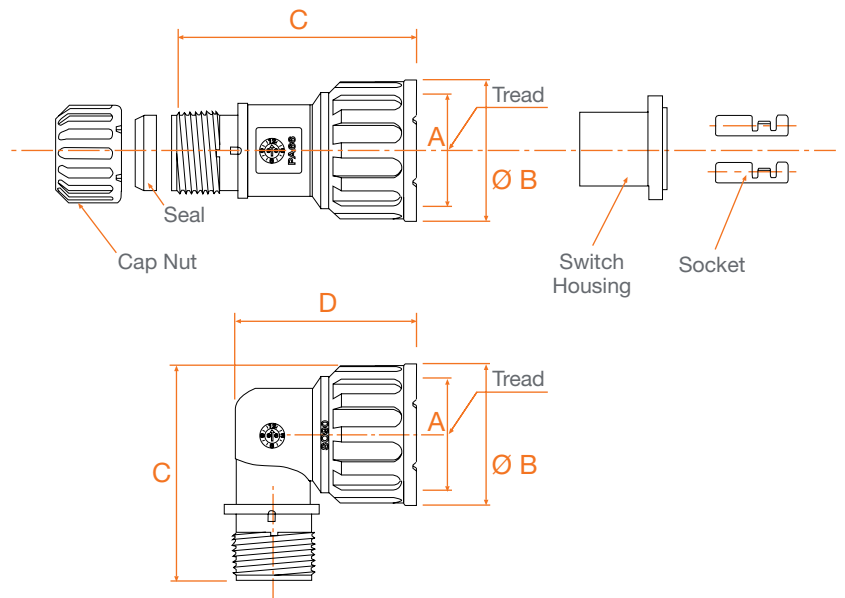

### Elbow Fitting

Part No.	Thread	Nominal Dimensions				Nut Colour
	A	B	C	D		
SC-M24-90	M24 x 1.0	31	38.5	40.5	Black	
SC-M27-90	M27 x 1.0	34	40	40.5	Grey	

## Straight Fitting

Part No.	Thread	Nominal Dimensions			Nut Colour
	A	B	C	D	
<b>SC-M24-S</b>	M24 x 1.0	31	53	-	Black
<b>SC-M27-S</b>	M27 x 1.0	34	54	-	Grey

## Suitable for Connector Type

Part No.	Suitable for Connector Type	Number of Pins	Nominal Dimensions			
	A		A	B	C	C
<b>RSGO2</b>	M27	2	25.0	3.5	18.7	23.0
<b>RSGO3</b>	M27	3	25.3	3.5	18.0	21.0
<b>RSGO4</b>	M27	4	25.3	3.5	18.7	23.0
<b>RSGO5</b>	M24	2	22.5	3.5	18.0	23.0
<b>RSGO6</b>	M24	3	22.3	3.5	18.0	21.0