

Deep Section Modified Slit PP Polypropylene Medium Weight Conduit

Description


DSPP conduit is made from flame retarded material.

DSPP slit conduits provide protection against mechanical shock whilst maintaining its form through tight bend radii.

Applications

DSPP has a deep section to maintain the conduit shape during bending. Deep Section Conduits are supplied in slit form to facilitate rapid cable installation and are designed for connection to all Harnessflex hinged fittings.

Configurations and Dimensions

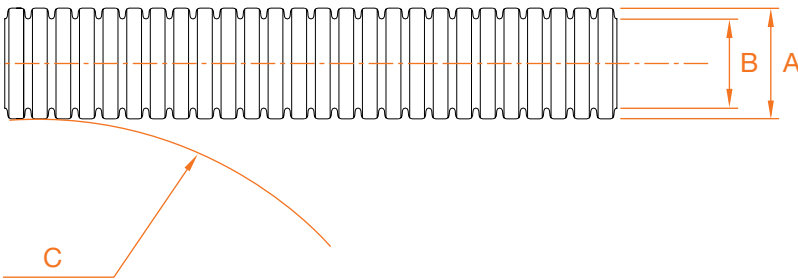

Part No.	Conduit Size (NC)	Conduit Size (NW)	Nominal O/D	Minimum Bore	Minimum static bend radius	Reel Length (m)	
			A	B	C		
DSPP08	08	7.5	10.0	6.6	10	100	
DSPP12	12	10	13.0	8.5	18	100	
DSPP16	16	13	16.2	11.1	32	100	
DSPP20	20	17	21.2	15.0	40	100	
DSPP28	28	23	28.5	21.7	50	100	
DSPP32	32	29	34.5	27.7	58	50	
DSPP40	40	36	42.5	34.6	80	25	
DSPP50	50	48	54.5	46.5	100	25	